
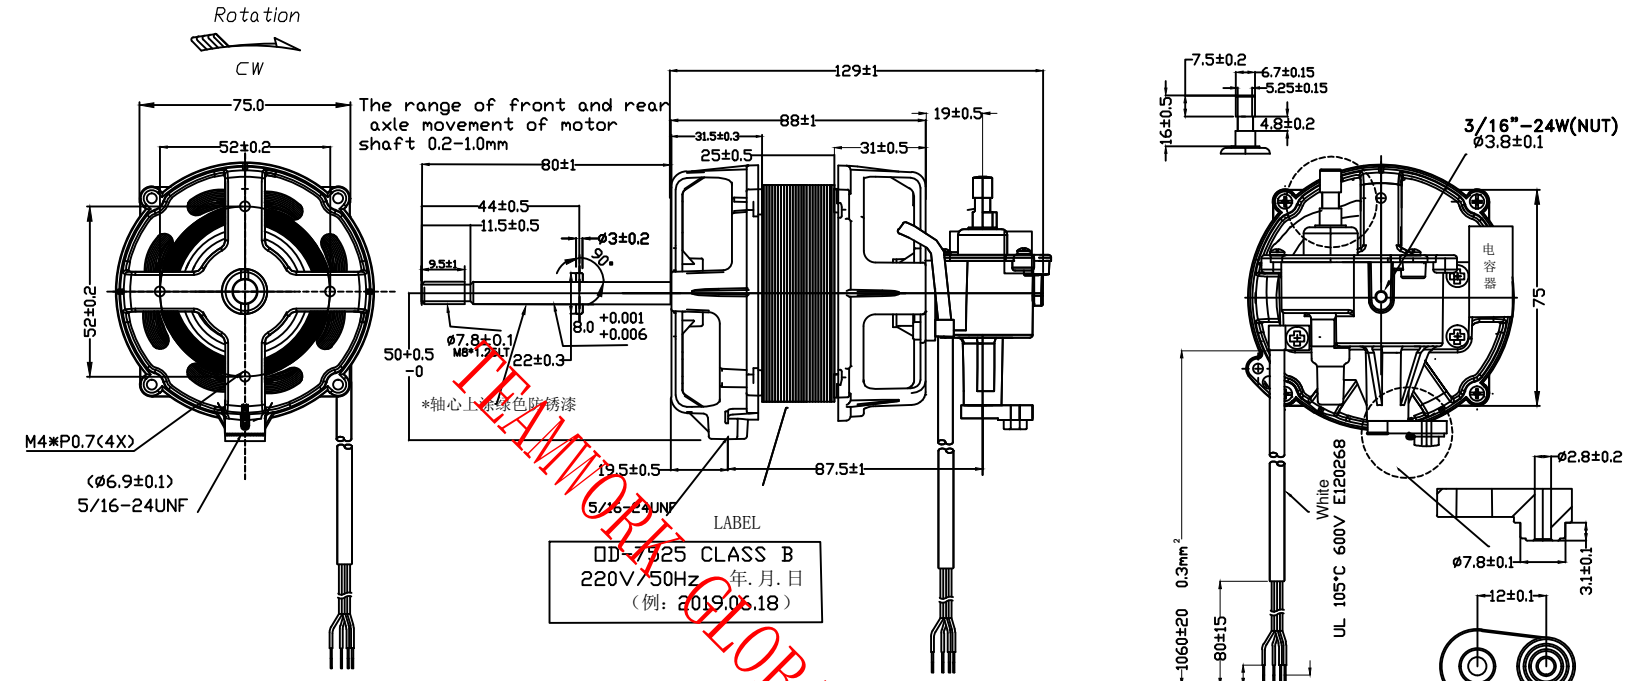




Rohs Compliance

PERFORMANCE (ON LOAD) (18"400.8g) :

Rated Voltage: 220V/50Hz

consumption:

	Current A	Power W	Speed rpm
High	±10%	±5%	±10%
Med	±10%	±5%	±10%
Low	±10%	±5%	±10%

NOTES:

1.TYPE:PERMANENT CAPACITOR MOTOR;
MOTOR WITH PERMANENT(4POLES)
2.SOURCE:SINGLE PHASE 220V/50Hz;
3.CAPACITORS:.2.0uf/400VAC;
4.COM-BLACK HIGH-WHITE MED-YELLOW LOW-RED ;
5. STATOR:75*25mm, ROTOR:25mm(Reference) ;
6.THERMAL CUTOFF FUSE :AUPO 250V 2A 130℃;
7.ENAMELED WIRE:QA-1(2UEW);
8.METERIAL OF GEAR BOX IS ALUMINIUM.
9.LEADER WIRE:UL 1015 22AWG 105℃*1060mm
10.CLASS OF INSULATION:CLASS B;
11.START VOLTAGE(With Fan)(有风叶低压起动):≤132V;
12.Strength of gear box(牙箱L杆扭力):≥10KG;
13.Temp Rise ≤75K ; 14.Ball bearing type


		DRAWING	丶	2019. 06. 18	PRODUCT MOTOR DRAWING
		CHECK			UNIT MM
		APPROVE			MOTOR MODEL
DATE	REMAVR	TEAMWORK GLOBAL GROUP LTD			TYPE OD-7525

TEAMWORK GLOBAL GROUP LIMITED
WWW.TW-motor.com

TEAMWORK GLOBAL GROUP LTD

馬達性能測試記錄表FAN MOTOR TEST REPORT

廠商 Manufacturer					產品型號 Product			18inch				日期 Date	2019/6/3
額定電壓 Rated Voltage		220V/ 50 Hz			客戶 Customer			WAC				溫升測試電壓 △T Test Voltage	233.2 V/ 50 Hz
NO.		1			2			3					
Item / Result		1min	5min		1min	5min		1min	5min	2H		其他要求 Other requirements	
電流 A	HI	0.27	0.27		0.28	0.27		0.27	0.275	0.26		馬達型號Motor model	7525
	MED	0.252	0.25		0.26	0.26		0.26	0.26	0.25			
	LOW	0.237	0.24		0.24	0.24		0.24	0.24	0.23			
功率 W	HI	59.6	59.1		60	59.8		59.9	59.5	58.8		定子厚度Stack thinkness (mm)	7525
	MED	54.2	54		55.3	54.6		55.5	55.3	53		保險絲TCO	A4-F 130 ℃250 V 2A
	LOW	50.3	49.9		51.4	51		51.4	51.3	48.7		電容Capacitor	2.0uf/400V S3 環保
轉速 RPM	HI	1161	1178		1163	1169		1176	1158	1163		扇葉Blade	18inch AS 3葉 400.8g
	MED	1084	1070		1075	1087		1082	1072	1037		扇網Grill	除底座奧丁16寸塑膠殼（無網）
	LOW	970	971		962	963		977	968	941		判定標準Judgment standard	CLASS B
電阻 Ω	HI									295		結果判定Judgment	OK
	MED									343			
	LOW									379			
溫升試驗 Temperature rise test	電阻 R_2 Ω HI									348			
	MED									405			
	LOW									449		除底座外其他用奧丁16寸塑膠殼（無網）	
	溫升 ΔT K HI									47.4		ΔT= R2/R1*(234.5+T1)-(234.5+T2)	
	MED									47.9			
	LOW									48.9		經(副)理 Manager	LIN
起動電壓Start voltage(V)		ED			65			70				課 長 Service	XIO
Hi-pot													
$T_{1(℃)}$										30		測 試 者 Tester	MU
$T_{2(℃)}$										30			







TEAMWORK GLOBAL GROUP LIMITED
WWW.TW-MOTOR.COM